

PRECISION ENERGY METER KIT

FEATURES:

- ◆ Polycarbonate NEMA Enclosure
(Multiple sizes available)
- ◆ Programmable Display
 - ◇ Color LCD (Touchscreen)
 - ◇ Large, easy to read
- ◆ Integrated power supply
- ◆ BACnet and Modbus Options



PRODUCT DESCRIPTION:

The Elkor Energy Meter Kit includes the WattsOn-Mark II precision energy meter installed in a NEMA panel with a touch screen color graphical display, pre-wired with a power supply. The kit is available with various CT styles and sizes.

The kit may be ordered in a small (8"x8") or medium (8"x10") enclosure. Kits include an internal universal (120-240VAC) 24VDC power supply which may be used by auxiliary devices inside the panel such as controls or gateways. Optional components such as shorting blocks, fuse blocks, or client supplied accessories may be installed.

The LCD touch screen panel features large, easy to read fonts and the ability to configure the display and meter locally. Trending is available over 24h, 1h and 2 minutes.

The communication between the display and the meter uses the auxiliary meter port, allowing the main communications port (optional BACnet or Modbus, serial or Ethernet) to be connected to external equipment, RTUs, PLCs or gateways.

The display may be customized by either the client, or by Elkor for a variety of features, display functions, logging, trending and visualizations (graphs, gauges).

The kit may be optionally ordered without the front panel display for full NEMA 4X rating.

SPECIFICATIONS:				
Size [1**]	Small (-S)		Medium (-M)	
Overall Dimensions (H x W x D)	7.94" x 8.15" x 3.98"		9.93" x 8.15" x 3.98"	
Internal Dimensions (H x W)	6.75" x 6.88"		8.75" x 6.88"	
Internal Fuse and CT Block	No		Yes	
Power Supply	120-240Vac, 15W (120-277Vac optional: -277PS model designation)			
Protocol [2**]	-M1 Model	-M2 Model	-E4 Model	
Communication Method	RS-485 Modbus/RTU	RS-485 BACnet/MSTP	Ethernet (RJ45), WiFi Modbus/TCP & Webserver & HTTP Post	
Current Input [3**]	-mV Model	-mA Model	-5A Model	-RC
CT Type	333mV Output	mA Output	XXX:5A Output	Rogowski Coil
Rated Input Range	0-333mV	0-200mA	0-5A	0-360mV
Display Option [4**]	-HMI		-DL	
Description	Front Color Touch LCD		Internal (on-meter) Display Only	
Enclosure NEMA Rating	NEMA 1		NEMA 4X	

ORDERING:

W2KIT- [1] - [2] - [3] - [4]


Example: W2KIT-S-M1-5A-HMI



W2KIT-S (-DL suffix — internal display only)



W2KIT-S (-HMI suffix — external touchscreen color HMI)

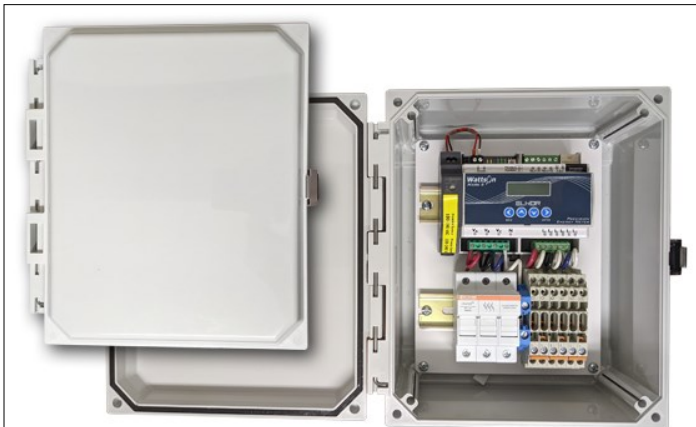

W2KIT-M (-DL suffix — internal display only)



W2KIT-M (-HMI suffix — external touchscreen color HMI)